




**SOBY**.COM  
TRUSTED SINCE 1961



SØBY  
**SR25-SR40-  
SRL60**  
Chain conveyors

SØBY chain conveyors are an economical and reliable solution for horizontal and inclined conveying of large quantities of grain, as well as the transport of seeds and ground bulk products.

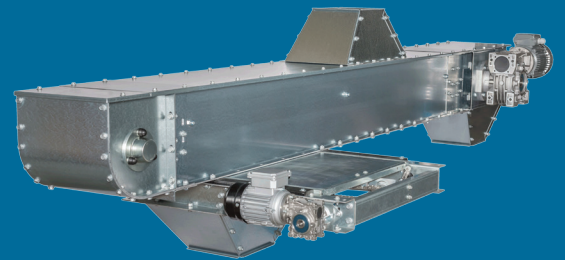

## Chain conveyors SR25-SR40-SRL60

SØBY chain conveyors are an internationally renowned quality product that can be incorporated wherever grain and ground bulk products need to be conveyed. Conveying systems with SØBY chain conveyors can always be extended or adapted as and when needs change.


### Scope of application

SØBY chain conveyors are used for conveying grain and free-flowing seeds horizontally and at shallow angles (7°) where gentle conveying is required. The chain conveyors are also suitable for conveying flour products.

SØBY SR25-SR40-SRL60 chain conveyors are also available for inclined conveying up to angles of 45° - either with a bend (15°, 30° or 45°), e.g. after a pit, or as a roof chain conveyor. Chain conveyors for bends and inclined conveying have extension sections with intermediate bottom and chain with extended flights.


### Applications

- Drive/tensioning section
- Gear and motor
- SR25 (Q16), SR40 (Q20), SRL60 (Q24) end outlet
- Rounded tail section
- Extension sections in 2 m, 1 m and 0.5 m, 0.25 m, also available with intermediate bottom
- Heavy-duty chain, 38.4 mm divisions
- Bottom/sides/top 2/2/1.5 mm (SR25)
- Bottom/sides/top 3/2/1.5 mm (SR40- SRL60)
- Inlet hopper SR25 (Q16), SR40 (Q20), SRL60 (Q24)

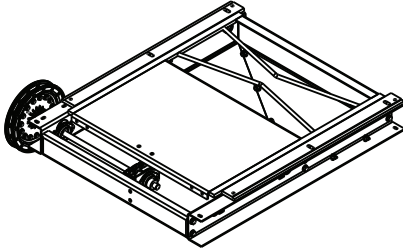


## Accessories


- Intermediate outlet with slide and outlet cleaner operated manually or electrically
- Capacity regulation in connection with pit chain conveyor. Cannot be used with bends and inclined transport (extended flights)
- Catwalks and supports where the chain conveyor can be located
- TipBox

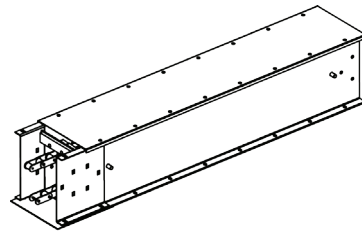

*Closed extension section with chain*

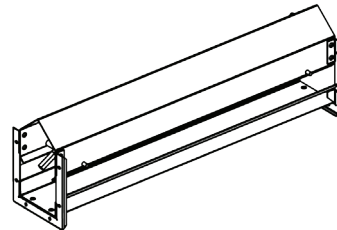

*Extension section with side inlet for pit incl. chain*



*1 m extension section for SR40 as 30° bend.  
Also available as 15° (0.5 m) and 45° (1.5 m)*

**SOBY** TRUSTED  
SINCE 1961

Viborgvej 306 · DK-7840 Højslev  
(+45) 97 53 50 33 · [soby@soby.com](mailto:soby@soby.com)  
[www.soby.com](http://www.soby.com)